

Signature Series™ Ferroresonant and Thyristor SwitchGear Regulator Systems

Unique high- and low-voltage stab connectors

ADVANTAGES

- Provide easy powerpack connection to bus bar and all control and monitoring wiring
- High-voltage feeds through auto-aligning stab connector located in rear of bay so there is no high-voltage on the door. Eliminates need for L-823 connectors/wiring on CCR output.
- Input power/control and monitoring feeds through a low-voltage stab connector located in the rear of the bay. There is no need to manually connect power or control wiring.
- Each powerpack is hot-swappable, eliminating costly shutdowns
- No tools required to remove powerpack from bay (except for seismic version)
- Quick electrical disconnect from bus bar allows routine maintenance to be done by one person with a hydraulic lift in about 15 minutes

BENEFITS

- Faster maintenance by fewer workers reduces labor costs
- Significantly increases safety


Removable powerpacks using compact hydraulic lift

ADVANTAGES

- Hot-swappable powerpacks reduce downtime when changing out a powerpack
- 4-30KW powerpacks easily slide in and out of the power bays
- Compact hydraulic lift allows work to be done by a single maintenance person
- One person with lift takes 15 minutes for routine maintenance vs. 3 people taking 6-8 hours

BENEFITS

- Easy to service, saves on labor costs and eliminates costly shutdowns
- Only need one spare regulator on hand for 4-30kW lineups, reducing material costs and inventory needs

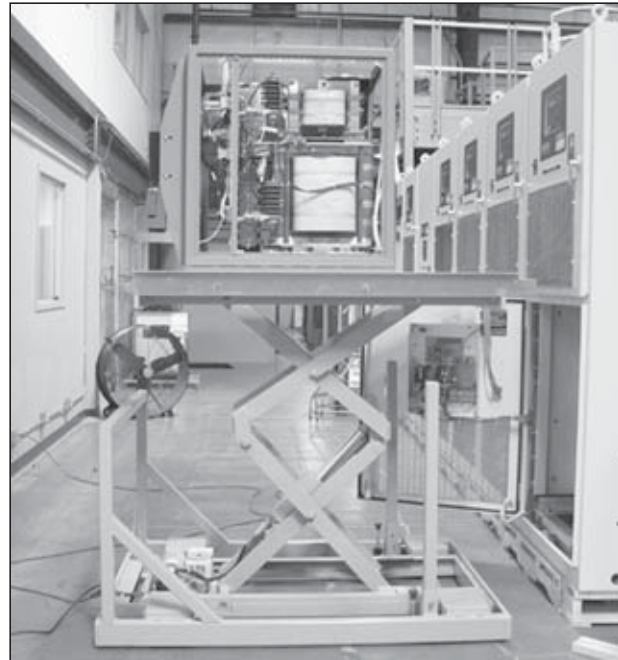

Space saving

ADVANTAGES

- An SGRS system uses up to 67% less space in a vault
- For new construction, can build a smaller vault
- Can use space in existing vault for other purposes, such as a maintenance shop
- Can expand power distribution system without building a new vault

BENEFITS

- Reduces expenditures on building, maintenance and operation
- Reduces the cost of new vault or the expansion of an existing power distribution system

Rollers have safety lock

ADVANTAGES

- Keeps CCRs immobile in the bay or on the lift

BENEFITS

- Safer and easier to service compared to stacked regulators that are bolted together

Optional integrated series cutout bay

ADVANTAGES

- Allows the series circuit to be disconnected from the regulator in a simple and safe manner during maintenance or testing, eliminating downtime
- Provides the ability to isolate faulty components quickly without affecting the entire system or airport operations
- Insulation resistance measurement between the series circuit and ground is possible without disconnecting the series cable
- Each series cutout can be locked for security measures

BENEFITS

- Allows appreciable time reduction and enhanced safety for maintenance personnel, especially at airports with a large number of series circuits
- Operational and material cost savings
- Eliminates costly shutdowns
- Increased security

All-in-one enclosure that contains CCRs, control and monitoring equipment, power system, and current protection

ADVANTAGES

- No exposed wires or cables
- No high-voltage on the door
- Eliminates the need for separate input power wiring to individual CCRs
- Only one connection to input power bay

BENEFITS

- Significant increase in safety
- Significant decrease in space requirements
- Easier to install


Ability to combine different powerpack sizes in a single SGRS lineup

ADVANTAGES

- 50 and 70kW air-cooled ferroresonant CCRs are available in a single bay and can be combined with 4-30kW CCRs in a single lineup

BENEFITS

- Provides increased flexibility to meet airport needs
- Spare equipment is minimized because only one spare powerpack of the largest CCR size is needed for a 4-30kW SGRS lineup

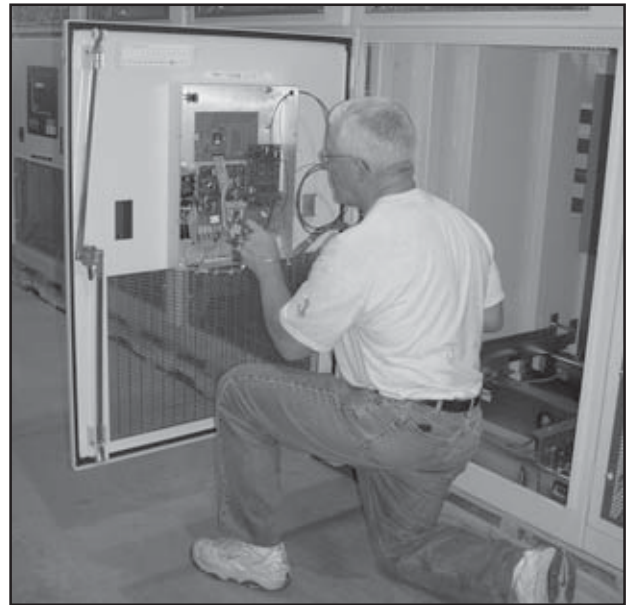

Modular design

ADVANTAGE

- Easy to install
- Easy to add bays
- Easy to upgrade powerpack size
- Future expansion location for IRMS in powerpack
- Functionality upgrades: current, voltage, wattage, lamps-out monitoring, and IRMS

BENEFITS

- Flexibility to meet airport needs
- Cost saving because airport can easily increase capacity without having to increase vault size or build a new building
- Upgrade expenses are reduced

Pre-wired at factory

ADVANTAGES

- All the high-voltage wiring is pre-wired and in the rear of the bay

- Easier for contractor to install
- No expensive maze of cabling needed to connect an SGRS lineup. One cable to the input power bay is all that's needed to connect the SGRS lineup to power.

BENEFITS

- Reduced installation costs
- Increased safety

The information contained in this document is subject to change without notice. Siemens reserves the right to make changes and improvements to its products and assumes no responsibility for making these modifications on any equipment previously sold.